



TAURULIFT T 204 H



www.ausa.com

AUSA Center, S.L. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)


- AUSA Madrid** ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com
- AUSA France** ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com
- AUSA UK** ● Unit 16 Hollows Works - Shawclough Road - Rochdale - Lancs OL12 6LN (U.K.) Tel.: +44 (0) 1706 64 96 91 E-mail: ausa.uk@ausa.com
- AUSA DEUTSCHLAND GmbH.** ● Heinrich - Welken Straße 5, 59069 HAMM - RHYNERN (GERMANY) Tel.: +49 2385922245 E-mail: ausa.deutschland@ausa.com
- AUSA Northamerica Corp.** ● 2655 Le Jeune Road - Suite 808, CORAL GABLES FL 33134 (USA) Toll free: 1 800 820 AUSA E-mail: ausa.corp@ausa.com
- BEIJING Rep. office** ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com



FEM-AEM



T 204 H 2000 Kg

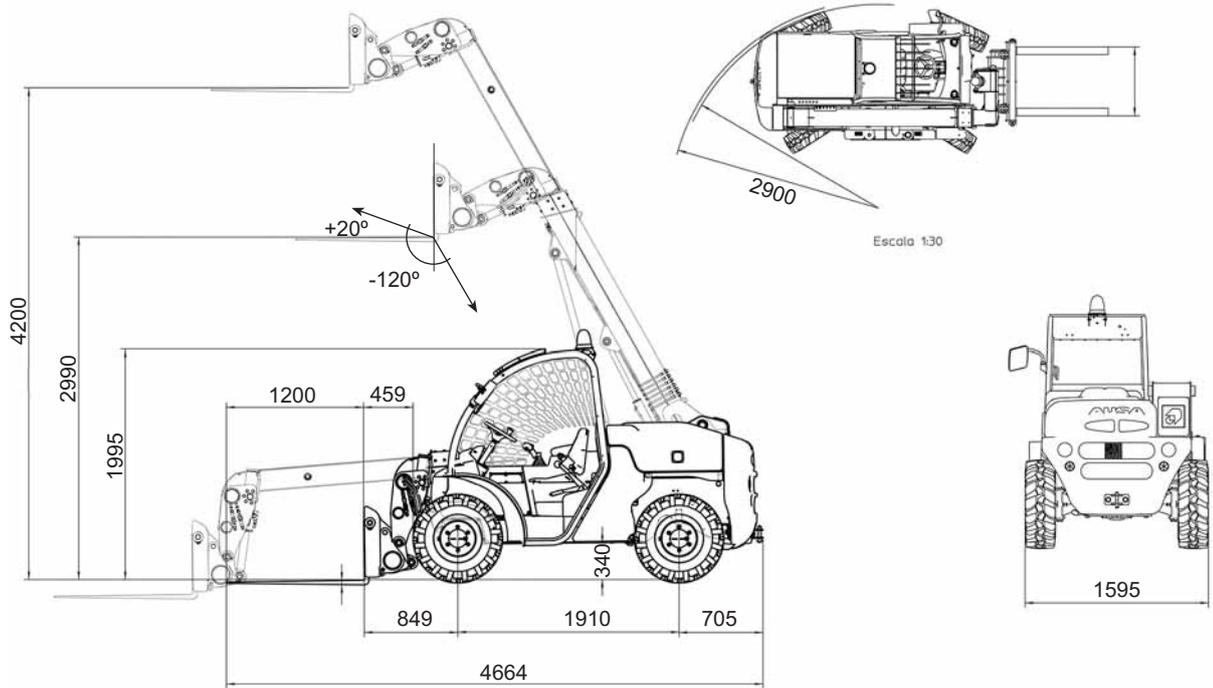

TECHNICAL SPECIFICATIONS

T 204 H


Load capacity (Kg)	Max. load	2000
	Load at max. height	2000
Lifting height (mm)	Maximum lifting height	4200
	Maximum lifting height at max. load	4200
Reach	Max reach (mm)	2598
	Capacity at max reach (Kg)	1000
Engine	Diesel	KUBOTA V2403
	Power acc./DIN 6270 B (KW/HP)	36.5 / 49.6 (2600 rpm)
	Power acc./DIN 70020 (KW/HP)	39.7 / 53.9 (2600 rpm)
	N° of cylinders	4
	Cooling system	Water
Traction		4x4 permanent
Transmission		Hidrostatic 2 gears. Electric gear inverter.
Engine starting system		Electric
Speed (Maximum) (Km/h)		24
Unladen weight (Kg)		4050
Gradient negotiable (with full load)		50 %
Hydraulic circuit		24 cc. gear pump. Working pressure 240 bar.
Tyres	Front	10 / 75-15,3 (14 PR)
	Rear	10 / 75-15,3 (14 PR)
External turning circle (mm)		2900
Steering		Hydraulic front wheel steer / all wheel steer / crab steer
Tank capacity (l)	Fuel	65
	Hydraulic fluid	70
Service brake		Disc
Parking brake		Mecanical at the same disk caliper

STANDARD EQUIPMENT

- Homologated FOPS-ROPS cabin
- Antivandalic system
- Adjustable ergonomic seat
- Seat belt
- Rear view mirror
- Rotating beacon
- Audible reverse warning
- Hydraulic quick hitch
- Tilting cabin for service
- Passive security system

OPTIONAL EQUIPMENT

- Semi-closed cabin / Full cabin with heater
- Air conditioning
- Wide tyres 12 x 16,5
- Lighting equipment
- Working light
- 600 l. hydraulic bucket
- Multi-Tach hydraulic system

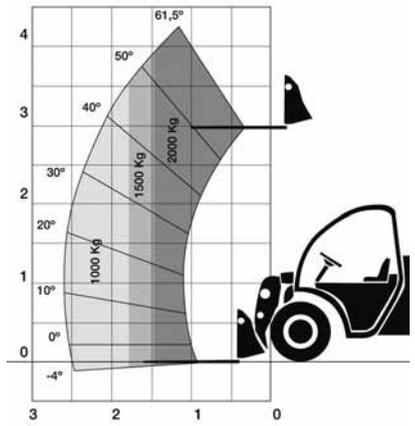

AUSA reserves the right to make any changes in the specifications without prior notice.